

# TECHNICAL DATA SHEET - Universal Projector Wall Arm

# InFocus

MODEL: SP-WALLARM-01

The **SP-WALLARM-01** Universal Projector Wall Arm is designed for the short throw projector. The projector is positioned from the wall by sliding the telescoping arm. The end result is a projection throw with a distance ranging from 28.75" - 50". The arm is compatible with both the Peerless SP-CEIL-UNIV and ACC560 projector mount line. Security fasteners are included.

## Features:

- Provides a projection throw distance of 28.75" - 50"
- Compatible with both the SP-CEIL-UNIV and ACC560
- Rated to 35 lbs max load
- Wall plate can be inverted to position the arm closer to the ceiling
- Cord management within the arm

## Accessories:

- WSP320 Metal Stud wall plate for 16" centers
- ACCMIS550 Security Cable for Metal Stud Installation
- ACC020 Projector Security Cable

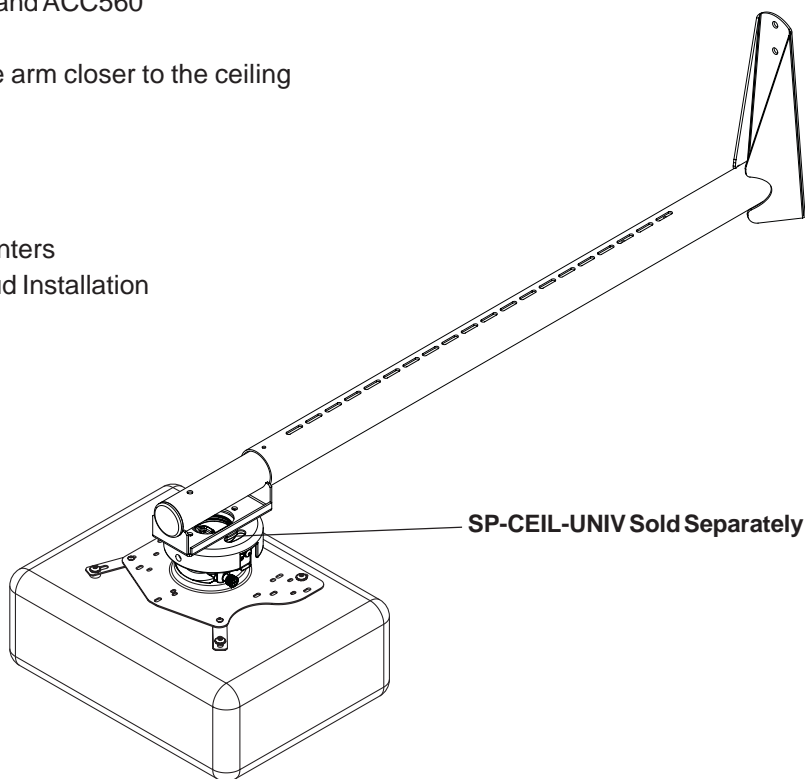
## Dimensions:

**Weight:**  
10.4 lb (4.7 kg)

**Shipping weight:**  
15.5 lb (7kg)

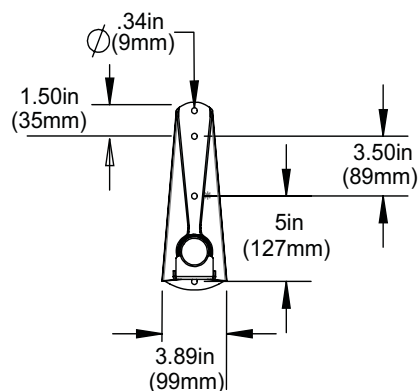
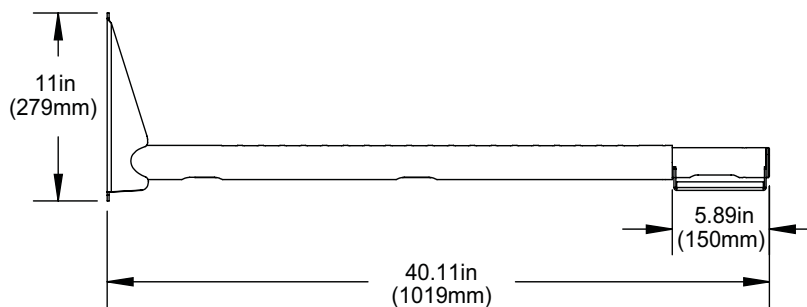
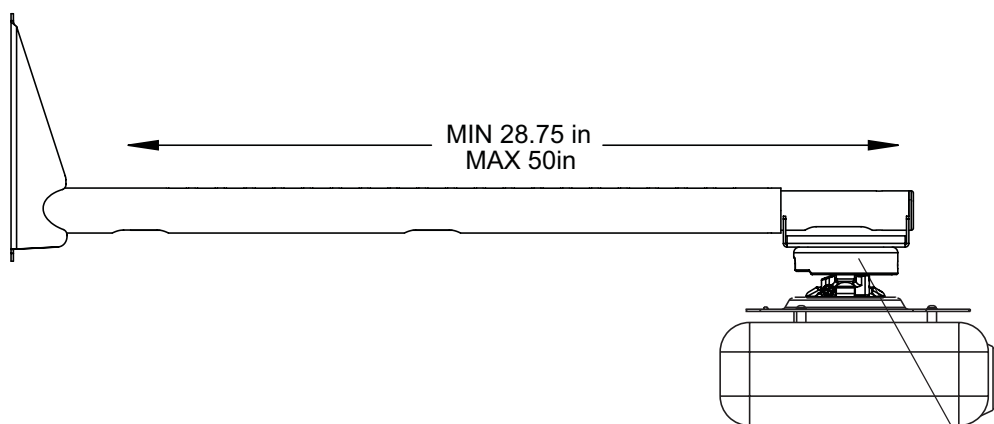
**Maximum Load Capacity:**  
35 lb (15.9 kg)

**Shipping Carton dimensions:**  
L = 47.25 in (1200 mm)  
W = 18 in (457 mm)  
H = 5 in (127 mm)



## ARCHITECTS SPECIFICATIONS

Projector Wall Mount shall be an InFocus model **SP-WALLARM-01** and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

**TECHNICAL DATA SHEET****MODEL: SP-WALLARM-01**ALL DIMENSIONS = INCH  
(MM)**FRONT VIEW****SIDE VIEW****SIDE VIEW WITH PROJECTOR**

SP-CEIL-UNIV Sold Separately